

It's an Emak S.p.A. trademark 42011 Bagnolo in Piano (RE) Italy www.mynibbi.com

ROTARY CULTIVATORS FOR INTENSIVE USE BRIK 5 S KAM 7 S KAM 13 S



of quality, innovation and completeness. The green of **Emak** is a green produced with care and respect, passion and design.

Gardening, farming and forestry tools for home users and professionals. Emak covers all shades of green. With different models to meet each user's needs but all sharing the same exceptional quality standards in terms of performance, reliability, comfort and safety.

Our product range includes over 250 models designed for all types of activity. Chain saws, brushcutters, lawnmowers, garden tractors, hedgetrimmers, rotary tillers, rotary cultivators, cutterbarmowers, transporters and much more besides, for jobs of varying intensity, power and frequency.

- 4 commercial brands
- 4 production units
- 8 branches (Germany, France, United Kingdom, Spain, Poland, Ukraine, China, Brazil)
- 135 distributors
- 85 countries covered
- 22.000 retail outlets served
- 22 product families

The world's first company in its sector to simultaneously hold ISO 9001 Quality, SA 8000 Ethical and ISO 14001 Environmental accreditation.



There's an **Emak** for everyone

3285031









ROTARY CULTIVATORS FOR INTENSIVE USE

BRIK 5 S

4-speed (2 forward + 2 reverse) with 4.00-8" wheels

with vertical and horizontal adjustment and 180°

reversible, with vibration-damping device

90 kg (with engine, rotor and wheels)

1: 1.05 2: 2.20 - 1R: 1.11 2R: 2.32

with oil-bath gearbox

oil-immersed bevel type

yes, with handlebar lever

independent 973 rpm

no

no

optional

no

ACCESSORIES INSTALLATION QuickFit (optional)



POWERFUL AND RELIABLE, EASY TO HANDLE, **REVERSIBLE AND VERSATILE,** THESE MACHINES REPRESENT THE IDEAL SOLUTION FOR ALL GROUND JOBS IN ANY SEASON



The EHS SYSTEM ensures ease of use, reduced effort and the maximum simplification for users.



Easy reachable commands: brakes can be activated separately, handlebar unlocks and rotates 180°, thus allowing to maneuver the machine on most difficult terrains (KAM 7 S, KAM 13 S).



Ergonomically positioned easy action levers for differential locking and reverse shuttle (KAM 7 S, KAM 13 S).



QuickFit coupling that allows the operator to change the tools without using tools (optional).



Engine hood for a better protection in case of bad weather conditions (KAM 13 S).

VAILABLE ACCESSORIES turbine rotor brush plough Free Ś \Box flail mower cutter bar shovel

GEARBOX	4-speed (2 forward + 2 reverse) with 4.00-10" wheels	
SPEED (km/h)	1: 1.20 2: 2.52 - 1R: 1.27 2R: 2.66	
TRANSMISSION	with oil-bath gearbox	
CLUTCH	oil-immersed bevel type	
HANDLEBARS	with vertical and horizontal adjustment and 180° reversible, with vibration-damping device	
REVERSE GEAR	yes, with handlebar lever	
DIFFERENTIAL	yes	
BRAKES	yes	
POWER TAKE-OFF	R TAKE-OFF independent 973 rpm	
ACCESSORIES INSTALLATION	DN QuickFit (optional)	
TOWING HITCH	yes	
COWLING	no	
WEIGHT	120 kg (with engine, rotor and wheels)	

ECHNICAL FEATURES

AVAILABLE ENGINES

GEARBOX

CLUTCH

BRAKES

SPEED (km/h)

TRANSMISSION

HANDLEBARS

REVERSE GEAR

POWER TAKE-OFF

TOWING HITCH


COWLING

WEIGHT

DIFFERENTIAL

Power supply	Engine	Model	Displacement/Power	Starting
gasoline	HONDA	GX 200 OHV	196 cm ³ /5.8 HP	recoil start
S gasoline	達 Emak	K 800 H OHV	182 cm ³ /5.7 HP	recoil start

Power supply	Engine	Model	Displacement/Power	Starting
Sgasoline	POWERED b HONDA	GX 200 OHV	196 cm ³ /5.8 HP	recoil start
Sgasoline	達 Emak	K 800 H OHV	182 cm ³ /5.7 HP	recoil start
Sgasoline	KOHLER.	CH 270 OHV	208 cm ³ /7.0 HP	recoil start
diesel	KIPOR	KM 178	296 cm ³ /5.5 HP	recoil start

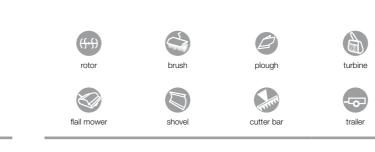



GEARBOX	6-speed (3 forward + 3 reverse) with 5.00-10" wheels		
SPEED (km/h)	1: 1.26 2: 2.64 3: 4.37 - 1R: 1.33 2R: 2.79 3R: 4.62		
TRANSMISSION	with oil-bath gearbox		
CLUTCH	dry multidisc		
HANDLEBARS	with vertical and horizontal adjustment and 180° reversible, with vibration-damping device		
REVERSE GEAR	yes, with handlebar lever		
DIFFERENTIAL	yes		
BRAKES	yes		
POWER TAKE-OFF	independent 973 rpm		
ACCESSORIES INSTALLATION	QuickFit (optional)		
TOWING HITCH	yes		
COWLING	yes		
WEIGHT	130 kg (with engine, rotor and wheels)		

Power supply	Engine	Model	Displacement/Power	Starting
S gasoline	POWERED b HONDA	GX 270 OHV	270 cm ³ /8.4 HP	recoil start
S gasoline	POWERED b HONDA.	GX 340 OHV	389 cm ³ /10.7 HP	recoil start
S gasoline	KOHLER.	CH 395 OHV	277 cm ³ /9.5 HP	recoil start
diesel		15LD350	349 cm ³ /7.5 HP	recoil start
diesel	KIPOR	KM 186	406 cm ³ /8.5 HP	recoil start
diesel		KM 186	406 cm ³ /8.5 HP	recoil start electric *
Adiesel		15LD440	441 cm ³ /10.9 HP	recoil start
diesel		15LD440	441 cm ³ /10.9 HP	recoil start electric *

*Battery supplied as standard



trailer

















